


asas
handle

AISI 303-304




i-100

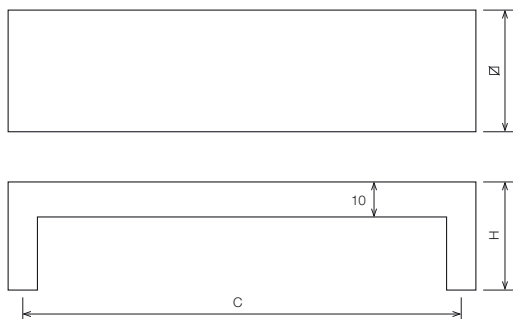


cod.	Ø	C	H	
15001	40	16	40	10
15015	40	96	40	5
15020	40	128	40	5
15025	40	160	40	5
15030	40	192	40	5
15050	40	320	40	5
15080	40	512	40	5

i-123

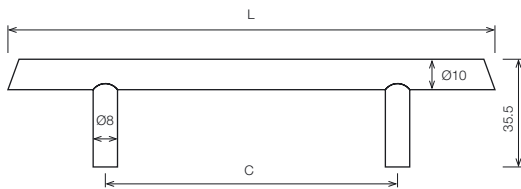


cod.	C	L	
20015	96	156	25
20020	128	188	25

i-128

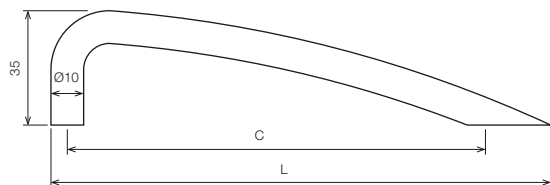

cod.	C	L	
20115	96	118	25
20120	128	153	25
20125	160	196	25


i-131 Ø8-10

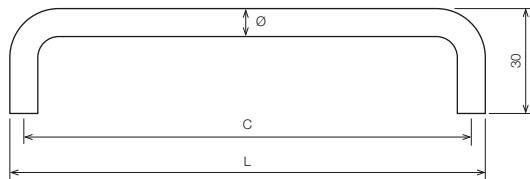

	cod.	C	L	
Ø8	21010	64	72	25
	21015	96	104	25
	21020	128	136	25
	21025	160	168	25
	21030	192	200	25
Ø10	21110	64	74	25
	21115	96	106	25
	21120	128	138	25
	21125	160	170	25
	21130	192	202	25
	21135	224	234	10
	*21140	256	266	10
	*21145	288	298	10
	21150	320	330	10
	*21155	352	362	10
	21165	416	426	10
	21180	512	522	10


* disponible bajo demanda
available on request

i-159

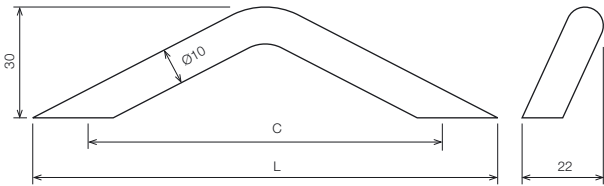

cod.	C	L	
22010	64	90	25
22015	96	126	25
22020	128	170	25


i-163 Ø10-12-14

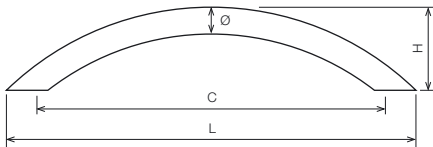

	cod.	C	L	H	
Ø10	23015	96	115	30,5	25
	23020	128	151	30,5	25
	23025	160	186	30,5	25
	23030	192	228	30,5	25
	23040	256	291	35	10
	23050	320	369	36	10
	23080	512	573	32	10
Ø12	23115	96	117	34	25
	23120	128	155	35	25
	* 23125	160	188	35	25
	* 23130	192	228	35	10
Ø14	23225	160	200	35	10
	23230	192	244	35	10
	* 23250	320	400	36	10

* disponible bajo demanda
available on request


i-200 Ø10

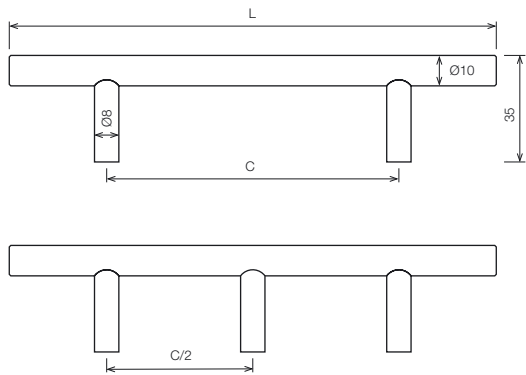

cod.	C	L	C/2	
10010	64	128		25
10015	96	160		25
10020	128	192		25
10025	160	224		25
10030	192	256		10
10035	224	288		10
10040	256	320		10
10045	288	352		10
10050	320	384		10
10055	352	416		10
10060	384	448		10
10065	416	480		10
10070	448	512		10
10075	480	544		10
10080	512	576		10
10085	544	608		10
10090	576	640		10
10095	608	672		10
10100	640	704	320	10
* 10105	672	736	336	10
10110	704	768	352	10
10115	736	800	368	10
10120	768	832	384	10
10125	832	896	384	10
* 10130	896	960	448	10
10135	960	1024	480	10
10140	1184	1248	592	10
10160	1376	1440	688	10

* disponible bajo demanda
available on request



i-200 Ø12

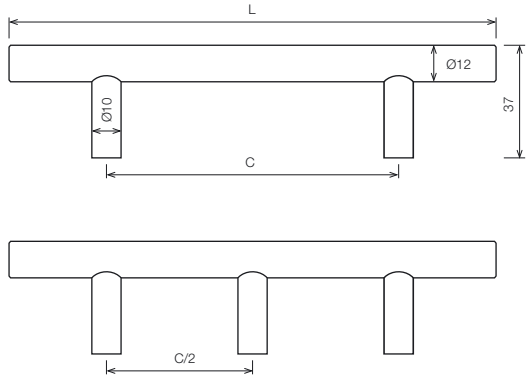

cod.	C	L	C/2	
12010	64	128		25
12015	96	160		25
12020	128	192		25
12025	160	224		25
12030	192	256		10
12035	224	288		10
12040	256	320		10
12045	288	352		10
12050	320	384		10
12055	352	416		10
12060	384	448		10
12065	416	480		10
12070	448	512		10
12075	480	544		10
12080	512	576		10
12085	544	608		10
12090	576	640		10
12095	608	672		10
12100	640	704		10
12105	672	736		10
12110	704	768		10
12115	736	800	368	10
* 12120	768	832	384	10
* 12125	832	896	416	10
* 12130	896	960	448	10
12135	960	1024	480	10
* 12139	1152	1216	576	10
* 12140	1184	1248	592	10
* 12145	1280	1344	640	10
* 12160	1376	1440	688	10
12167	1408	1472	704	10
12172	1440	1504	720	10

* disponible bajo demanda
available on request

i-200 Ø14

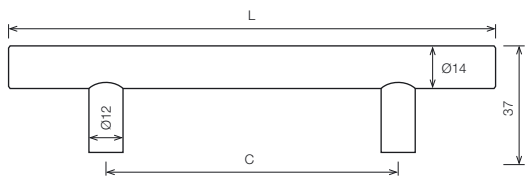

cod.	C	L	C/2	
14010	64	144		25
14015	96	176		25
14020	128	208		10
14025	160	240		10
14030	192	272		10
14035	224	304		10
14040	288	368		10
14050	320	400		10
14055	352	432		10
14060	384	464		10
*14065	416	496		10
14075	480	560		10
14090	576	656		10
14100	640	720		10
*14105	672	752		10
14115	736	816		10
*14130	896	976		10
14135	960	1040		10
*14139	1152	1232		10
*14145	1280	1360	640	10
*14167	1408	1488	704	10
*14172	1440	1520	720	10

* disponible bajo demanda
available on request


kit i-200 Ø14



so 12



edso




cod.	L	
93400	24	20
93401	50	20

Para convertir, tirador i-200 Ø14 como asidero de puerta
To convert a handle i-200 Ø14 into a door pull handle

cod.	ØD	L	
93200	12	40	20

cod.	ØD	L	
93101	10	35	20
93102	12	37	20
93103	14	39	20

i-201




cod.	C	H	
22100	32	26	25
22101	32	40	25
22102	64	42	25


i-202



cod.	C	H	
22104	32	32	25




i-205

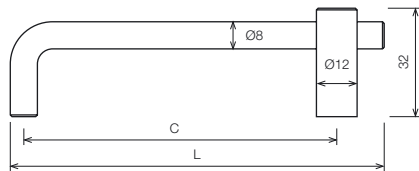


cod.	C	L	
22210	64	83	25
22215	96	118	25
22220	128	152	25

i-331

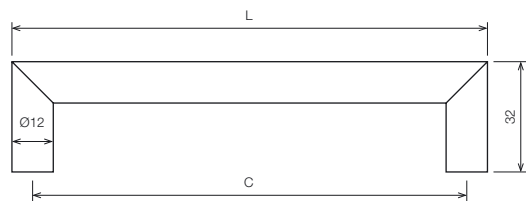


cod.	C	L	
24115	96	108	25
24120	128	140	25
24125	160	172	25
24130	192	204	10
24145	288	300	10
24150	320	332	10
24160	384	396	10
24175	480	492	10
24196	736	748	10

i-333

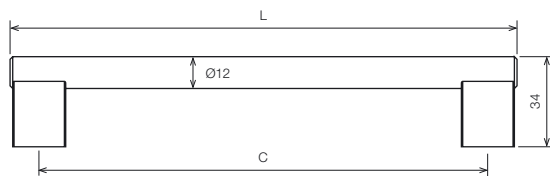


cod.	C	L	
24420	128	150	25
24425	160	182	25
24430	192	214	10
24446	292	314	10
24450	320	342	10
24453	342	364	10
24461	392	414	10
24477	492	514	10
24493	592	614	10
24497	792	814	10

i-400 Ø12

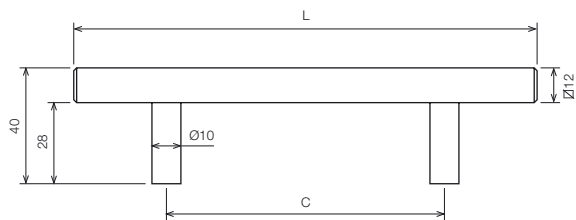


cod.	C	L	
12415	96	160	25
12420	128	192	25
12425	160	224	10
12430	192	256	10
12435	224	288	10
12440	256	320	10
12445	288	352	10
12450	320	384	10
12460	384	448	10
12475	480	544	10
12480	512	576	10
12500	640	704	10

i-440 Ø12

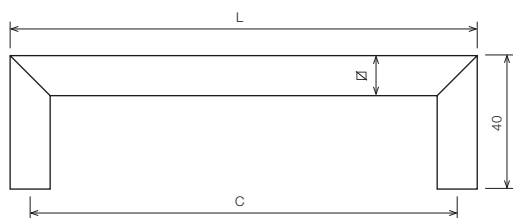

	cod.	C	L	
Ø12	26215	96	108	25
	26220	128	140	25
	26225	160	172	10
	26230	192	204	10
	26235	224	236	10
	26250	320	332	10
	26280	512	524	10

i-440 Ø15

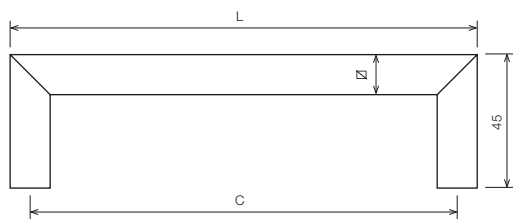

	cod.	C	L	
Ø15	26420	128	143	10
	26425	160	175	10
	26430	192	207	5
	26435	224	239	5
	26450	320	335	5
	26480	512	527	5